



# E40 DATA SHEET

## SPECIFICATIONS & PERFORMANCE

### PERFORMANCE

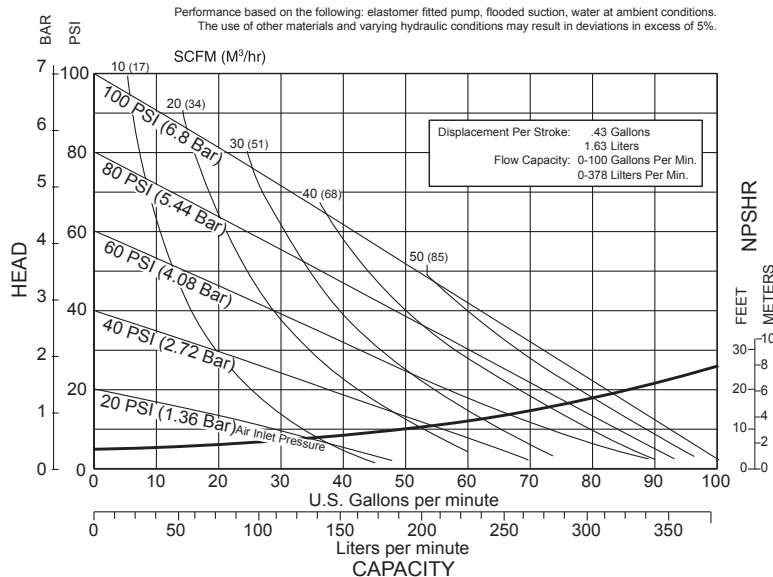

### DIMENSIONS

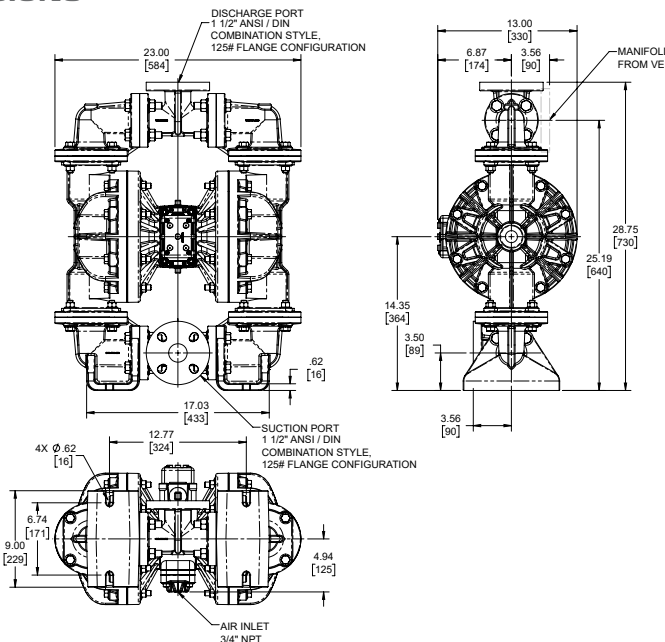

## 1 1/2" Bolted Plastic with Plastic Center Sections

### SPECIFICATIONS

#### Flow Rate

Adjustable to 0-100 gpm (0-378 lpm)

#### Port Size

Suction . . . . . 1 1/2" ANSI / DIN

Discharge . . . . . 1 1/2" ANSI / DIN

Air Inlet . . . . . 3/4" NPT

Air Exhaust . . . . . 1" NPT

#### Suction Lift

Dry . . . . . 19' (5.8 m)

Wet . . . . . 29' (8.8 m)

#### Max Solid Size (Diameter)

. . . . . 0.47" (12 mm)

Max Noise Level . . . . . 89 dB(A)

#### Shipping Weights

Polypropylene . . . . . 82 lbs. (37kg)

PVDF . . . . . 112 lbs. (51kg)

Conductive Poly . . . . . 85 lbs. (38kg)



**VERSAMATIC®**

Warren Rupp, Inc. | A Unit of IDEX Corporation  
800 North Main Street | Mansfield, OH 44902 USA  
Phone: 419.526.7296 | Fax: 419.526.7289

[VERSAMATIC.COM](http://VERSAMATIC.COM)

e40nmdICdsATEX-rev0120

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.